



Rotating cleaning nozzles, »CanCleaner« and »MiniWhirly« ball bearing-mounted


Rotating cleaning head with flat spray nozzles and ball bearings.

Advantages

- Effective rotating cleaning by means of flat spray nozzles
- Optimum internal cleaning of plant protection equipment tanks, canisters, containers and plant protection product packaging
- Self-powered, without external drive
- Slow rotation for optimum cleaning effect
- Resistant to chemicals

CanCleaner

- 20% increased flow rate towards canister bottom
- ISO 10625 colour coded, size 60

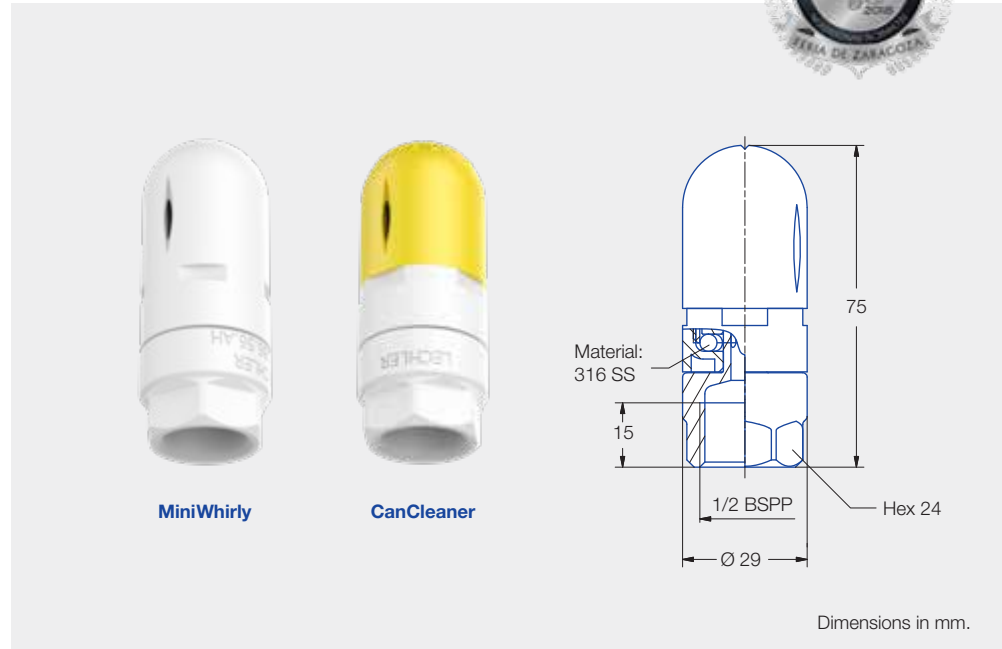

Spray angle
300°



Material
POM



Pressure range
2 – 3 – 5 bar



Operating principle
Free-spinning



Max. tank diameter
1.3 m



Filtration
Line strainer with a mesh size of 0.3 mm/50 mesh



Bearing
Ball bearing made of stainless steel

Type	Ordering no.	l/min				Max. tank diameter [m]	
		2.0 bar	3.0 bar	4.0 bar	5.0 bar		
300° 	CanCleaner 60	500.186.56.06.00.0	20.4	25	28.9	32.3	1.3
	MiniWhirly	500.186.56.AH	18.0	22.0	25.4	28.4	1.3



Function video

Scan the QR-code
or go to:
www.lechler.com/miniwhirly

