

# Rotating cleaners CanCleaner and MiniWhirly



- Rotating cleaning head with flat spray nozzles and ball bearings

### Advantages

- Effective rotating cleaning by means of flat spray nozzles
- Optimum internal cleaning of plant protection equipment tanks, canisters, containers and plant protection product packaging
- Self-powered, without external drive
- Slow rotation for optimum cleaning effect
- Resistant to chemicals




CanCleaner



MiniWhirly

Dimensions in mm.

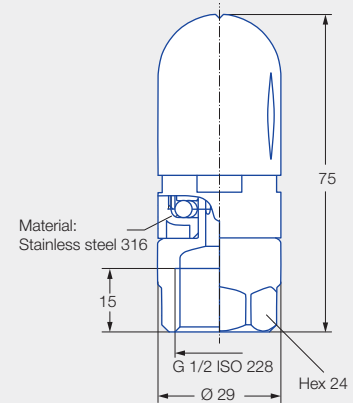

### CanCleaner

- Even more effective cleaning due to 20 % higher flow rate towards canister bottom
- Color-coded in accordance with ISO 10625, in size 60

CanCleaner/MiniWhirly

### Technical data:



**Spray angle**  
300°



**Materials**  
POM, stainless steel



**Pressure ranges**  
2–3–5 bar



**Operating principle**  
Free-spinning



**Max. tank diameter**  
1,3 m



**Pre-filtering**  
Line strainer with a mesh size 0.3 mm/50




**Bearing**  
Ball bearing made of stainless steel

**Function video**  
[www.lechler.com/de-en/medialibrary](http://www.lechler.com/de-en/medialibrary)

Or simply scan the QR code.



Spray angle	Designation	Order no.	V̇ water [l/min]				Max. tank diameter [m]
			2.0 bar	3.0 bar	4.0 bar	5.0 bar	
300° 	CanCleaner 60 (25 M)	<b>500.186.56.06.00</b>	20.4	25.0	28.9	32.3	1.3
	MiniWhirly (25 M)	<b>500.186.56.AH.00</b>	18.0	22.0	25.4	28.4	1.3

