



High- and medium-pressure cleaning nozzles

Solid and flat spray nozzles for high- and medium-pressure pressure cleaners.

Advantages

- Maximum cleaning force due to „razor-sharp“ cleaning jets
- Wear-resistant, hardened special stainless steel for long service life
- Recessed outlet opening protects nozzle against mechanical damage
- Maximum precision for uniform, concentrated jet force
- Connection possible via external thread and union nut

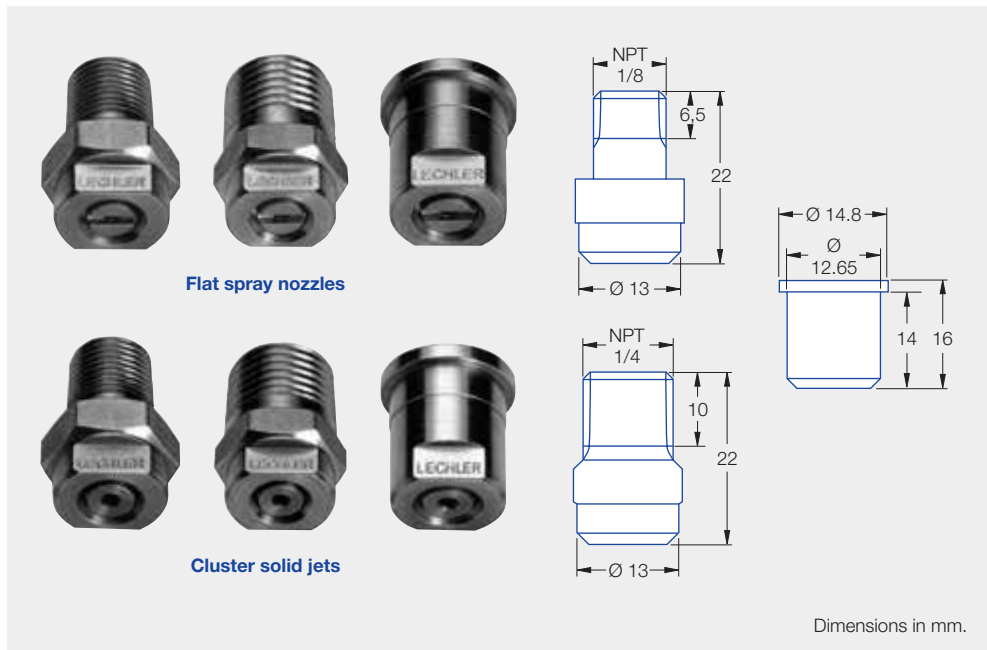

 **Nozzle sizes**
04 – 06

 **Spray angle**
0° – 40°

 **Material**
hardened stainless steel, (hard-metal insert on request)

 **Pressure range**
5 – 40 – 200 bar

 **Width across flats**
10 mm

	Nozzle type	l/min			Ordering no.		
		[bar]			Male threads		Threaded version
		5.0	60.0	100.0	NPT 1/8	NPT 1/4	G 3/8
0°	00-04	2.04	7.1	9.2	550.450	546.450	548.450
	00-05	2.55	8.9	11.5	550.480	546.480	548.480
	00-06	3.05	10.6	13.6	550.520	546.520	548.520
15°	15-04	2.04	7.1	9.2	608.451	602.451	652.451
	15-05	2.55	8.9	11.5	608.481	602.481	652.481
	15-06	3.05	10.6	13.6	608.521	602.521	652.521
25°	25-04	2.04	7.1	9.2	608.452	602.452	652.452
	25-05	2.55	8.9	11.5	608.482	602.482	652.482
	25-06	3.05	10.6	13.6	608.522	602.522	652.522
40°	40-04	2.04	7.1	9.2	608.453	602.453	652.453
	40-05	2.55	8.9	11.5	608.483	602.483	652.483
	40-06	3.05	10.6	13.6	608.523	602.523	652.523