




Injector agitator nozzles

Agitator nozzle for fast and homogeneous mixing in tanks.

Advantages

- Injector effect reinforces turbulence of the solid jet in the tank
- Effective circulation of large liquid quantities with a relatively small flow rate
- Clog-resistant due to large cross-sections

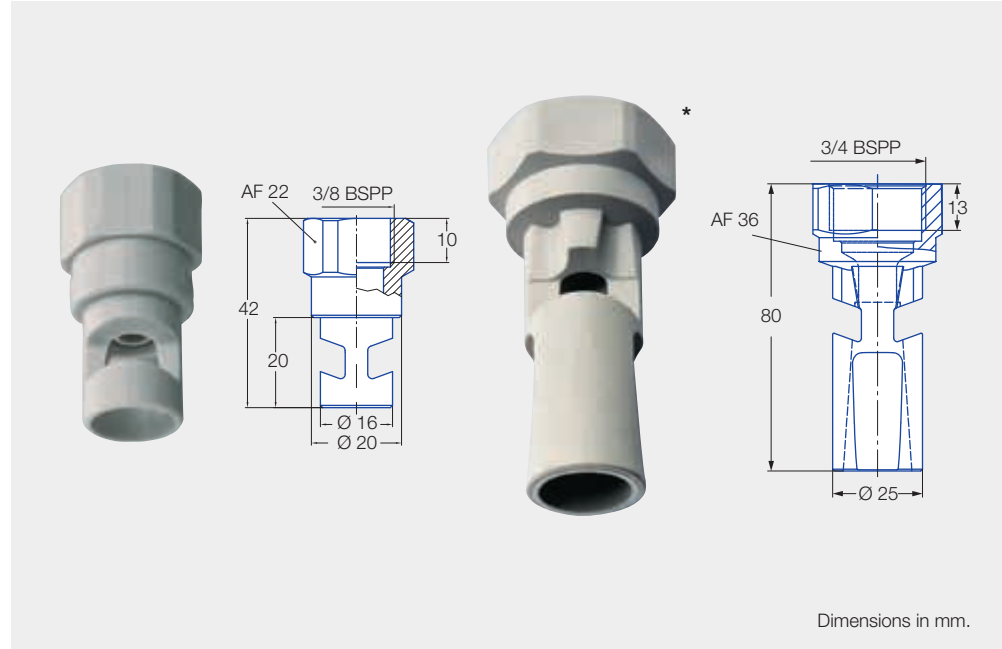

Bore diameter
Ø 2.2 – 10.55 mm



Material
PP



Pressure range
2 – 10 bar

Ordering no.	Bore-Ø (mm)	l/min				
		2.0 bar	4.0 bar	6.0 bar	8.0 bar	10.0 bar
500.262.53.02	2.2	4.4	6.3	7.7	8.9	9.9
500.262.53.04	3.6	11.1	15.7	19.2	22.1	27.7
500.262.53.06	4.5	18.3	26.0	31.8	36.7	41.0
500.262.53.08	6.0	31.6	44.7	54.8	63.2	70.7
500.262.53.20*	10.55	96.1	136.0	166.5	192.3	215.0

* See dimensioning

Assembly note

Assembly with eyelet connector (see page 112)

