



- Lever coupling system with NPT and BSP threads (BS21 and DIN EN 10226)

#### Advantages


- Chemically resistant to agricultural chemicals and liquid fertilizers
- Corrosion-resistant stainless steel
- Easy handling
- Pressure:
- 1/2"-2" max. 9.0 bar
- 3" max. 5.0 bar

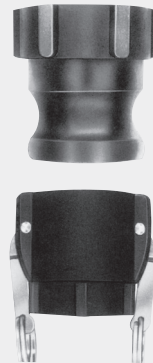

#### FIXLOC system parts

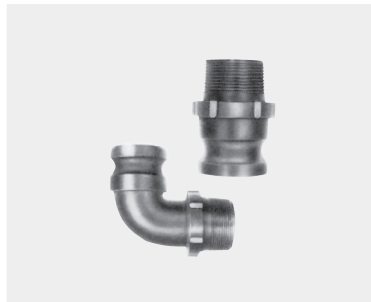

Designation	Connection	Order no.
<b>Male adapter with female threads</b> straight version	1/2" NPT female	<b>B050-A-NPT</b>
	3/4" NPT female	<b>B075-A-NPT</b>
	1" BSP female	<b>B100-A-BSP</b>
	1 1/4" NPT female	<b>B125-A-NPT</b>
	1 1/2" BSP female	<b>B150-A-BSP</b>
	2" BSP female	<b>B200-A-BSP</b>
	3" BSP female	<b>B300-A-BSP</b>
	same but as 90° elbow	
<b>Male adapter with male threads</b> straight version	1/2" NPT male	<b>B050-F-NPT</b>
	3/4" NPT male	<b>B075-F-NPT</b>
	1" BSP male	<b>B100-F-BSP</b>
	1 1/4" NPT male	<b>B125-F-NPT</b>
	1 1/2" BSP male	<b>B150-F-BSP</b>
	2" BSP male	<b>B200-F-BSP</b>
	3" NPT male	<b>B300-F-NPT</b>
	3" BSP male	<b>B300-F-BSP</b>
same but as 90° elbow	1 1/2" NPT male	<b>B150-F 90°-NPT</b>
	2" NPT male	<b>B200-F 90°-NPT</b>
<b>Male adapter with hose shank</b>	1/2"	<b>B050-E</b>
	3/4"	<b>B075-E</b>
	1"	<b>B100-E</b>
	1 1/4"	<b>B125-E</b>
	1 1/2"	<b>B150-E</b>
	2"	<b>B200-E</b>
	3"	<b>B300-E</b>
<b>Female coupler with female threads</b> straight version	1/2" NPT female	<b>B050-D-NPT</b>
	3/4" NPT female	<b>B075-D-NPT</b>
	1" BSP female	<b>B100-D-BSP</b>
	1 1/4" NPT female	<b>B125-D-NPT</b>
	1 1/2" BSP female	<b>B150-D-BSP</b>
	2" BSP female	<b>B200-D-BSP</b>
	3" NPT female	<b>B300-D-NPT</b>
	3" BSP female	<b>B300-D-BSP</b>
same but as 90° elbow	1 1/2" NPT female	<b>B150-D 90°-NPT</b>
	2" NPT female	<b>B200-D 90°-NPT</b>

	Designation	Connection	Order no.
	Female coupler with male thread	1/2" NPT male	B050-B-NPT
		3/4" NPT male	B075-B-NPT
		1" BSP male	B100-B-BSP
		1 1/4" NPT male	B125-B-NPT
		1 1/2" BSP male	B150-B-BSP
		2" BSP male	B200-B-BSP
		3" NPT male	B300-B-NPT
		3" BSP male	B300-B-BSP
	Female coupler with hose shank straight version	1/2"	B050-C
		3/4"	B075-C
		1"	B100-C
		1 1/4"	B125-C
		1 1/2"	B150-C
		2"	B200-C
		3"	B300-C
	same but as 90° elbow	1 1/2"	B150-C 90°
		2"	B200-C 90°
	Plug for female coupler	1/2"	B050-PL
		3/4"	B075-PL
		1"	B100-PL
		1 1/4"	B125-PL
		1 1/2"	B150-PL
		2"	B200-PL
		3"	B300-PL
	Plug for male coupler	1/2"	B050-CAP
		3/4"	B075-CAP
		1"	B100-CAP
		1 1/4"	B125-CAP
		1 1/2"	B150-CAP
		2"	B200-CAP
		3"	B300-CAP
	Spare gasket for FIXLOC lever couplings EPDM	1/2"	B075-G
		3/4"	B075-G
		1"	B100-G
		1 1/4"	B100-G
		1 1/2"	B150-G
		2"	B200-G
		3"	B300-G

#### Note

The following coupling types are compatible: 125 (1 1/4") with 100 (1") and 75 (3/4") and 50 (1/2").  
For thread table, see Page 15.