




- Lever coupling system with NPT and BSP threads (BS21 and DIN EN 10226)

Advantages



- Chemically resistant to agricultural chemicals and liquid fertilizers
- Corrosion-resistant stainless steel
- Easy handling
- Pressure:
 - 1/2"–2" max. 9.0 bar
 - 3" max. 5.0 bar

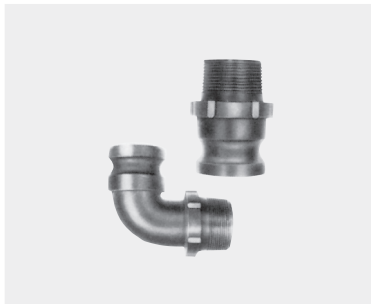

FIXLOC system parts



Designation	Connection	Order No.
Male adapter with female threads straight version	1/2" NPT female	B050-A-NPT
	3/4" NPT female	B075-A-NPT
	1" BSP female	B100-A-BSP
	1 1/4" NPT female	B125-A-NPT
	1 1/2" BSP female	B150-A-BSP
	2" BSP female	B200-A-BSP
	3" BSP female	B300-A-BSP
	same but as 90° elbow	1 1/2" NPT female
2" NPT female		B200-A 90°-NPT
Male adapter with male threads straight version	1/2" NPT male	B050-F-NPT
	3/4" NPT male	B075-F-NPT
	1" BSP male	B100-F-BSP
	1 1/4" NPT male	B125-F-NPT
	1 1/2" BSP male	B150-F-BSP
	2" BSP male	B200-F-BSP
	3" NPT male	B300-F-NPT
	3" BSP male	B300-F-BSP
same but as 90° elbow	1 1/2" NPT male	B150-F 90°-NPT
	2" NPT male	B200-F 90°-NPT
Male adapter with hose shank	1/2"	B050-E
	3/4"	B075-E
	1"	B100-E
	1 1/4"	B125-E
	1 1/2"	B150-E
	2"	B200-E
	3"	B300-E
Female coupler with female threads straight version	1/2" NPT female	B050-D-NPT
	3/4" NPT female	B075-D-NPT
	1" BSP female	B100-D-BSP
	1 1/4" NPT female	B125-D-NPT
	1 1/2" BSP female	B150-D-BSP
	2" BSP female	B200-D-BSP
	3" NPT female	B300-D-NPT
	3" BSP female	B300-D-BSP
same but as 90° elbow	1 1/2" NPT female	B150-D 90°-NPT
	2" NPT female	B200-D 90°-NPT

	Designation	Connection	Order No.
	Female coupler with male thread	1/2" NPT male	B050-B-NPT
		3/4" NPT male	B075-B-NPT
		1" BSP male	B100-B-BSP
		1 1/4" NPT male	B125-B-NPT
		1 1/2" BSP male	B150-B-BSP
		2" BSP male	B200-B-BSP
		3" NPT male	B300-B-NPT
		3" BSP male	B300-B-BSP
	Female coupler with hose shank straight version	1/2"	B050-C
		3/4"	B075-C
		1"	B100-C
		1 1/4"	B125-C
		1 1/2"	B150-C
		2"	B200-C
		3"	B300-C
	same but as 90° elbow	1 1/2"	B150-C 90°
		2"	B200-C 90°
		Plug for female coupler	1/2"
3/4"			B075-PL
1"			B100-PL
1 1/4"			B125-PL
1 1/2"			B150-PL
2"			B200-PL
3"			B300-PL
	Plug for male coupler	1/2"	B050-CAP
		3/4"	B075-CAP
		1"	B100-CAP
		1 1/4"	B125-CAP
		1 1/2"	B150-CAP
		2"	B200-CAP
		3"	B300-CAP
	Spare gasket for FIXLOC lever couplings EPDM	1/2"	B075-G
		3/4"	B075-G
		1"	B100-G
		1 1/4"	B100-G
		1 1/2"	B150-G
		2"	B200-G
		3"	B300-G

Note

The following coupling types are compatible: 125 (1 1/4") with 100 (1") and 75 (3/4") and 50 (1/2").
For thread table, see Page 15.