




Diaphragm nozzle holder for air-assisted sprayers, Assembly accessories, Relocation kit, Electric border nozzle kit




Diaphragm nozzle holder

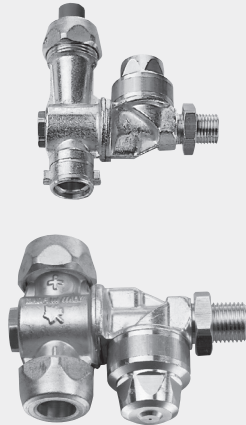


Designation	Material	Order no.
Bayonet diaphragm nozzle holder incl. threaded cap and bayonet cap Opening pressure: 0.7 bar Closing pressure: 0.7 bar Max. working pressure: 25 bar		
G 1/4 male	Brass	ZTRA.EGE.RK.OM.B
Diaphragm nozzle holder incl. 2 threaded caps Opening pressure: 1.1 bar Closing pressure: 0.9 bar Max. working pressure: 40 bar		
G 1/4 male	Brass	095.016.30.09.61
G 1/4 female	Brass	095.016.30.09.62

Assembly accessories




Designation	Material	Order no.
Reduction socket M 18 x 1,5 female / G 1/4 female	Brass	095.016.30.12.80
Reduction socket G 3/8 female / G 1/4 female	Brass	095.019.30.00.23
Reduction coupling G 3/8 male / G 1/4 female	Brass	065.221.30.00.00

Relocation kit

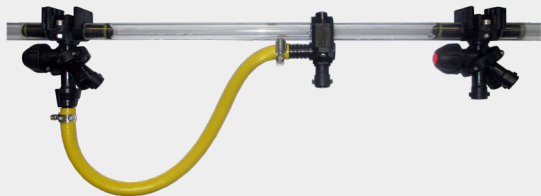

Description	Order no.
Variable row adaptation (e.g. corn 0.75 m row spacing) with relocation kit Installation on wet boom 1/2" (20–22 mm) 3/4" (25–28 mm) on request	092.174.00.00.00

Electric border nozzle kit



Description	Order no.
<ul style="list-style-type: none">• Retrofittable, compact 3-way valve with integrated nozzle holders• Can be electrically controlled from the driver's seat• Ideally suited for FB nozzles in combination with FD nozzles, IS nozzles in combination with ID nozzles, IDK nozzles in combination with IDKS nozzles, IDTA nozzles in combination with IS nozzles and IDKT nozzles in combination with IDKS nozzles See page 87	065.290.00.00.00

Good to know

You can find further information and our assembly instructions here:
www.lechler.com/de-en/support

