



## »Top Flow II«

# Electro magnetic flow meter with digital read out

### Features

- Display of overall volume and volume flow
- Temperature range -15 °C to +65 °C
- Measuring accuracy 99%:  
1": 8 – 400 l/min  
2": 25 – 1.100 l/min  
3": 60 – 2.500 l/min
- Max. pressure: 10 bar at 20 °C

### Advantages

- Self-calibrating
- Independent of density and viscosity
- Simple and fast assembly via manifold and Fixloc connection
- Suitable for UAN and PPP




## AirPress HP – pneumatic pressure regulator for boom sprayers

Pressure regulation via pressure chamber with air pressure.

### Advantages

- Large volume flow range
- Fast pressure regulation without delay
- Ideal in combination with automatic boom section and individual nozzle control
- NEW – up to 10 bar spray pressure

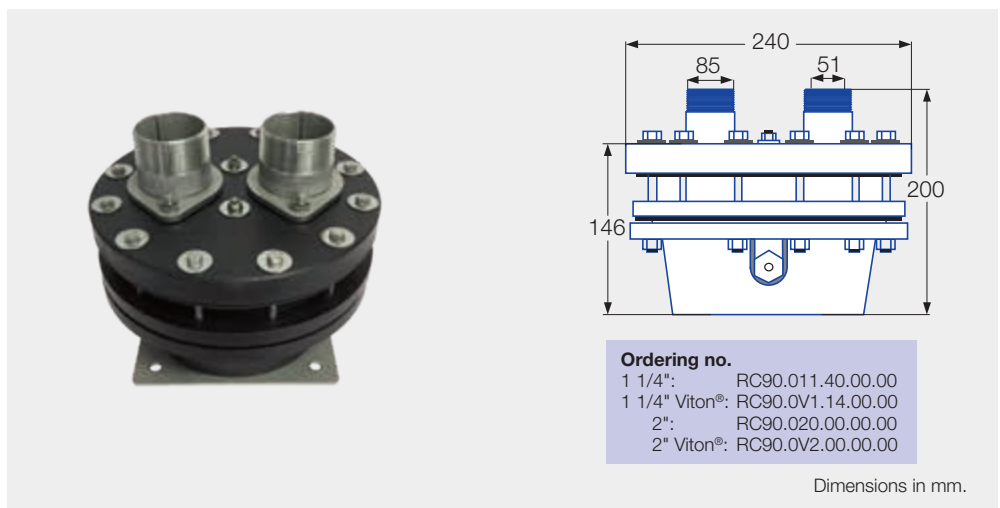

Specifications	AirPress HP 1 1/4"	AirPress HP 2"
Weight	5.4 kg	5.5 kg
Connections	G 1 1/4" male for In- and Outlet 1/4" BSP for air connection	G 2" male for In- and Outlet 1/4" BSP for air connection
Material	Nylon, Polyethylene, Stainless Steel, NBR (option Viton®), CR	
Pressure Range - New	max. 10 bar	
Pressure Drop	Up to 100 lpm only 0.2 bar pressure drop, at 250 lpm ~ 0.5 bar	
Max. Flow	250 lpm	500 lpm