




»TWISTLOC« Bayonet caps Solenoid valve

- Simple handling
- Ergonomic shape

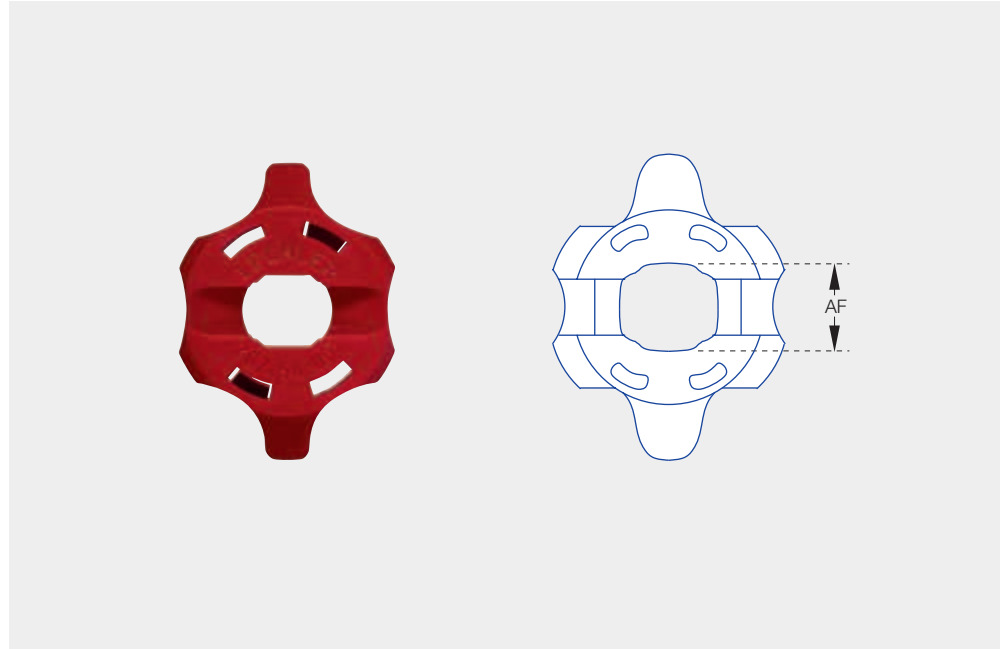

TWISTLOC	Description	Color code	Ordering no.
incl. gasket (065.242.73.00) combines with following systems*: – Lechler – Holder – Amazone – Schmotzer – Brendecke – Vogel & Noot	for nozzles with 8 mm AF (IDK, IDKN, IDKT, AD, QS, LU, ST, IDKS, OC, E)	□ white	065.204.56.05
		■ brown	065.204.56.06
	for nozzles with 8 and 10 mm AF (ID3, IDK, IDKN, IDKT, AD, QS, LU, ST, DF, IS, IDKS, OC, E, FL, FS)	■ red	065.202.56.00
		■ black	065.202.56.01
		■ yellow	065.202.56.02
		■ green	065.202.56.03
		■ blue	065.202.56.04
		■ grey	065.202.53.00
		■ black	065.202.56.11
		■ dark grey	065.202.56.50
Round-hole bayonet cap incl. gasket (065.242.73.00)	for TR, ITR, FT, BN, hose shank for FT	■ black ■ dark grey	065.202.56.11 065.202.56.50
Shut-off cap incl. gasket (095.015.6C.02.85.0)		■ beige	065.202.56.40

* Depending on series/type.

Solenoid valve	Description	Max. pressure	Ordering no.
	Fitting to TWISTLOC and MULTIJET nozzle holders		
	3-pin plug connection GDM according to DIN 43650 Power consumption: 0.8 A Tightening torque at nozzle holder 2,5 Nm	8.0 bar	065.277.56.00.00.0
	Solenoid valve to fit dry booms. Power consumption: 0.5 A		Z-Endvalve
	Hose-Ø 11.0 mm	10.0 bar	Z-Endvalve 11
	Hose-Ø 13.0 mm	10.0 bar	Z-Endvalve 00
	Spare part piston		Z-E06011.00