




TWISTLOC


Nozzle holder



- Quick-change nozzle system (max. operating pressure 20.0 bar)

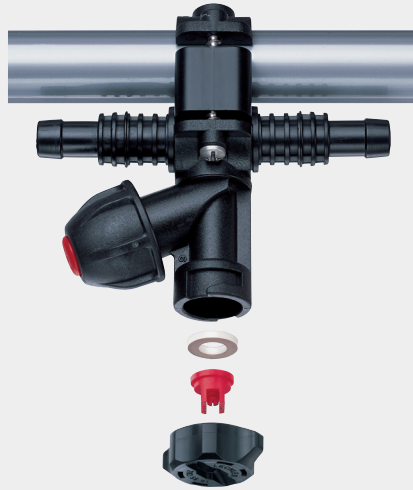

Diaphragm check valve for hose connection

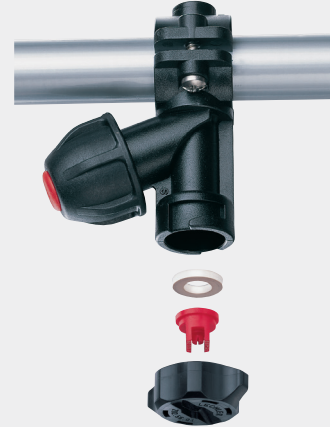

Diaphragm check valve for installation on pipelines




Diaphragm check valve with eyelet connector
For 3/4" pipes
065.272.56.KL
For 1/2" pipes
065.272.56.KH



Diaphragm check valve with threaded connection
M 18 x 1.5
065.272.56.HB



Hose connection single
For pipe outside dia. 3/4"
(25–28 mm O.D.)
065.274.56.KL
For pipe outside dia. 1/2"
(20–22 mm O.D.)
065.274.56.KH

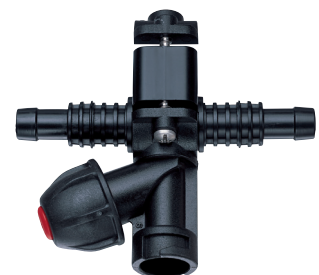

Hose connection double
For pipe outside dia. 3/4"
(25–28 mm O.D.)
065.275.56.KL
For pipe outside dia. 1/2"
(20–22 mm O.D.)
065.275.56.KH

Nozzle strainer with molded gasket
60 M
065.268.7J (Page 121)
25 M
065.269.7J (Page 121)



Eyelet clamp
For 1" pipes
090.023.51.KA
For 3/4" pipes
090.013.51.KA
For 1/2" pipes
090.003.51.KA



Bayonet adapter with threaded connection
M 18 x 1.5
095.009.00.07.98



Ball check valve
Mesh size 60 M:
065.265.56.00
Mesh size 25 M:
065.266.56.00



Bayonet cap
Overview on Page 127



Gasket
065.242.73







TWISTLOC

Bayonet caps and solenoid valves



Advantages

- Simple handling
- Ergonomic shape



TWISTLOC	Designation	Color code	Order No.
(incl. gasket 065.242.73.00) for combination with following systems ¹ : <ul style="list-style-type: none"> • Lechler • Holder • Amazone • Schmotzer • Brendecke • Vogel & Noot 	for nozzles with 8 mm AF IDK, IDKN, IDKT, AD, QS, LU, ST, IDKS, OC, E	white	065.204.56.05
		brown	065.204.56.06
	for nozzles with 8 and 10 mm AF ID, IDK, IDKN, IDKT, AD, QS, LU, ST, DF, IS, IDKS, OC, E, FL, FS	red	065.202.56.00
		black	065.202.56.01
		yellow	065.202.56.02
		green	065.202.56.03
		blue	065.202.56.04
		gray	065.202.53.00
Round-hole bayonet cap (incl. gasket 065.242.73.00)	for TR, ITR, FT, BN hose shank	black	065.202.56.11
	for FT	dark-gray	065.202.56.50
Shut-off cap (incl. gasket 095.015.6C.02.85.0)		beige	065.202.56.40

Solenoid valve	Designation	Maximum pressure [bar]	Order No.
	Solenoid valve for TWISTLOC and MULTIJET nozzle holders		
	GDM 3-pin plug connection according to DIN 43650, power consumption: 0.8 A Tightening torque at nozzle holder: 2.5 Nm	8.0	065.277.56.00.00.0
	Solenoid valve for hose connection, power consumption: 0.5 A		
	Hose dia. 10.0 mm	10.0	Z-Endvalve 10
	Hose dia. 13.0 mm	10.0	Z-Endvalve 00
Spare part piston			Z-E06011.00

¹ Depending on series/type.