




»TWISTLOC« Quick release system (Max. pressure 20.0 bar)

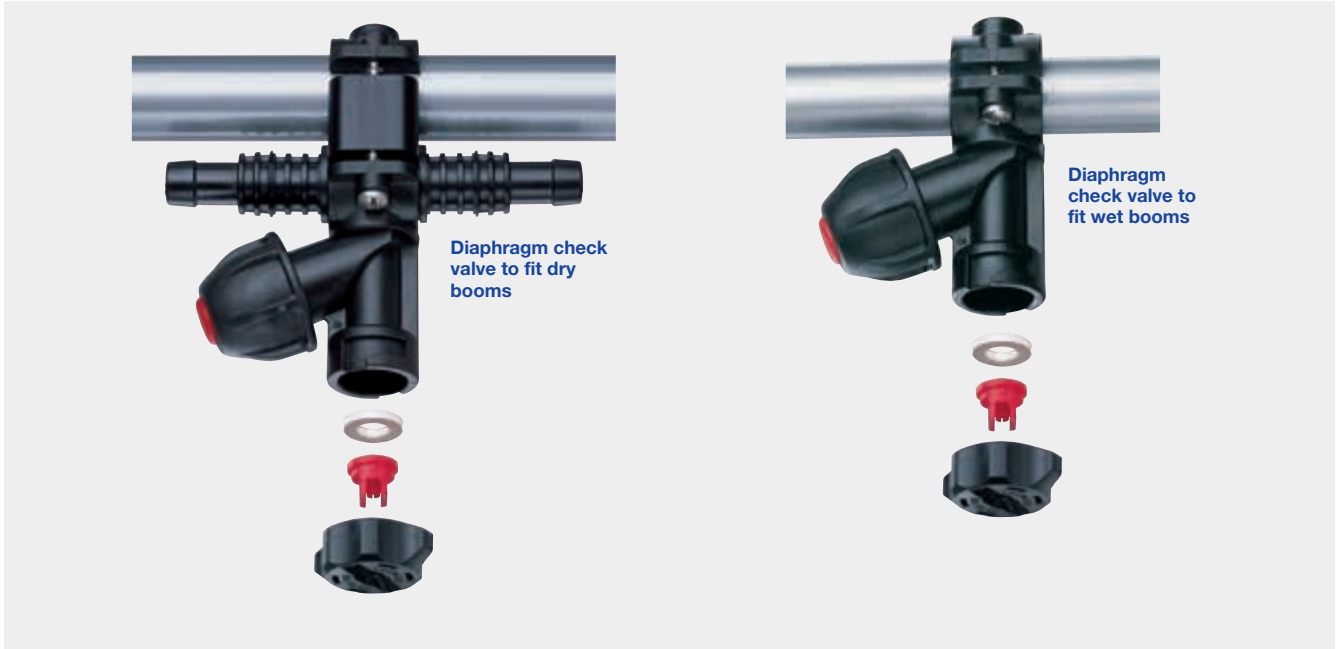

Diaphragm check valve to fit dry booms

Diaphragm check valve to fit wet booms



Diaphragm check valve with eyelet connector for 3/4" pipes
065.272.56.KL
for 1/2" pipes
065.272.56.KH



Diaphragm check valve for threaded connection
M 18 x 1.5
065.272.56.HB



Single-hose connector for 3/4" boom tubings (25-28 mm O.D.)
065.274.56.KL
for 1/2" boom tubings (20-22 mm O.D.)
065.274.56.KH



Two-hose connector for 3/4" boom tubings (25-28 mm O.D.)
065.275.56.KL
for 1/2" boom tubings (20-22 mm O.D.)
065.275.56. KH

Strainer (with integrated seal)
60 M
065.268.7J
see page 105
25 M
065.269.7J
see page 105



Eyelet connector
for 1" pipes
090.023.51.KA
for 3/4" pipes
090.013.51.KA
for 1/2" pipes
090.003.51.KA



Bayonet adapter with female thread
M 18 x 1.5
Ordering no. 095.009.00.07.98



Ball check valve
60 M
065.265.56.00
25 M
065.266.56.00



Bayonet cap
Range page 111



Gasket
065.242.73

