




VarioSelect®/VarioSelect® II 2- and 4-way nozzle holder

2-way or 4-way nozzle holder with pneumatic control for variable application rate control.

Advantages

- Operation optionally in „Vario“ or „Select“ mode
 - Vario: Fully-automatic control of nozzles/nozzle combination and continuously variable adaptation of the application rate and pressure
 - Select: Manual activation and deactivation of individual nozzles/nozzle combinations
- V2 in new more compact design with proven PSV valve technology (see page 103)
- V4 in modular design
- Single valve located directly in front of the nozzle
- Central liquid supply

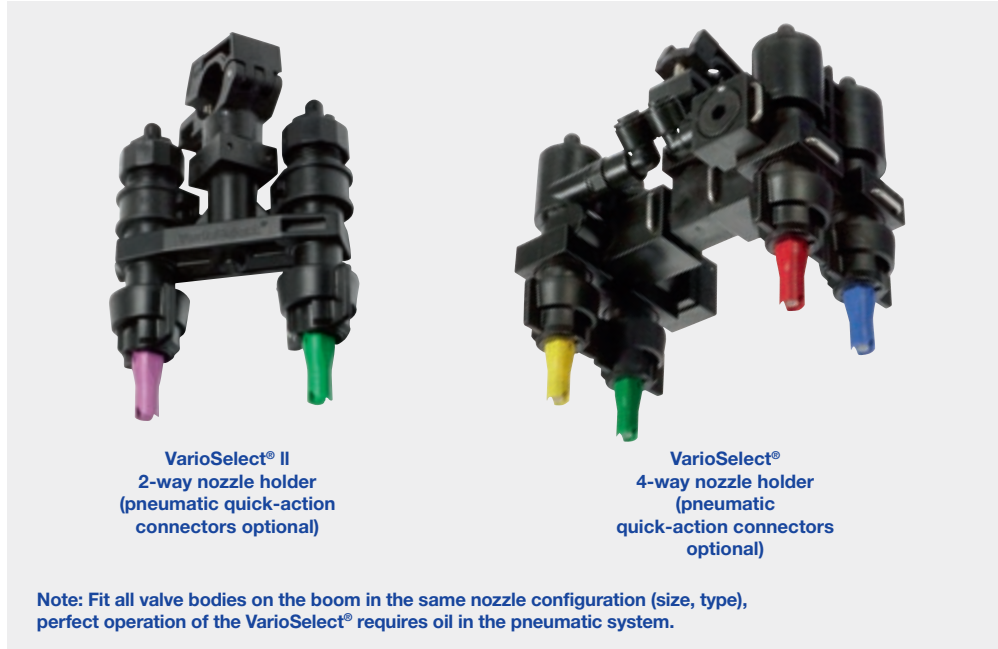

Material

POM, POM fibre glass reinforced, EPDM, Viton®, FPM, stainless steel



Emergency stop

at input voltage
4.5 bar



Switching valve

0.2 sec



Pressure range

Max. 8 bar

Code for pipe diameter:

| | |
|-------------|----|
| 20 mm | 20 |
| 25 mm | 25 |
| 1/2", 22 mm | 21 |
| 3/4" | 27 |
| 1" | 34 |

Code for pre-assembled pneumatic quick-action connection (optional):

| | |
|--------------------|---|
| 90° | A |
| Basis | B |
| Y | Y |
| Others on request. | |

Example of ordering

| | |
|--|------------------|
| V2, 1/2" with Y pneumatic connection | 065.284.56.21.0Y |
| V4, 3/4" with 90° pneumatic connection | 065.286.MN.27.A0 |


2-way nozzle body V2

Direction of sprayer ↑

Ordering no.



Main dimensions of 2-way nozzle body 1/2"

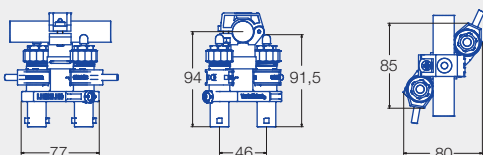


Dimensions in mm.


4-way nozzle body V4

Direction of sprayer ↑

Ordering no.

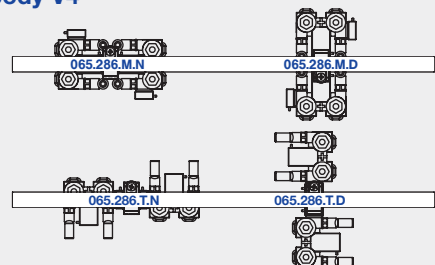

Main dimensions of 4-way nozzle body 1/2"

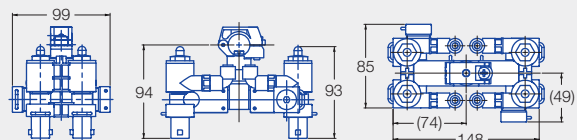

Dimensions in mm.

