



Für Baureihe	Bestell-Nr.			Schraube	Abmessungen [mm]							Gewicht (Polyamid)				
	Type	Material-Nr.			G ISO 228	Rohr ø	D ø	B _R * ø	B** ø	B ₁	B ₂		B ₃	H ₁	H ₂	
		51	53													5E
2TR/216/302/308/350 468/548/679/684/652	090.053	○	○	○	Material Edelstahl 1.4305	G 3/8	3/8"	16,5-18,0	6,0	6,2-6,4	19,0	22,0	18,5	34,5	14,5	20 g
	090.003	○	○	○		G 3/8	1/2"	20-22,0	6,0	6,2-6,4	21,2	23,8	18,5	36,5	16,5	20 g
	090.013	○	○	○		G 3/8	3/4"	25-27,5	7,6	7,8-8,0	24,5	26,5	22,0	39,5	17,5	25 g
	090.023	○	○	○		G 3/8	1"	32-34,5	10,6	10,8-11,0	30,0	31,0	22,0	44,0	21,0	32 g
	090.033	○	○	○		G 3/8	1 1/4"	40-43,0	12,6	12,8-13,0	34,0	35,5	25,0	48,0	25,0	38 g

*B_R Ø = Zapfendurchmesser

**B ø = Empfohlener Bohrungsdurchmesser

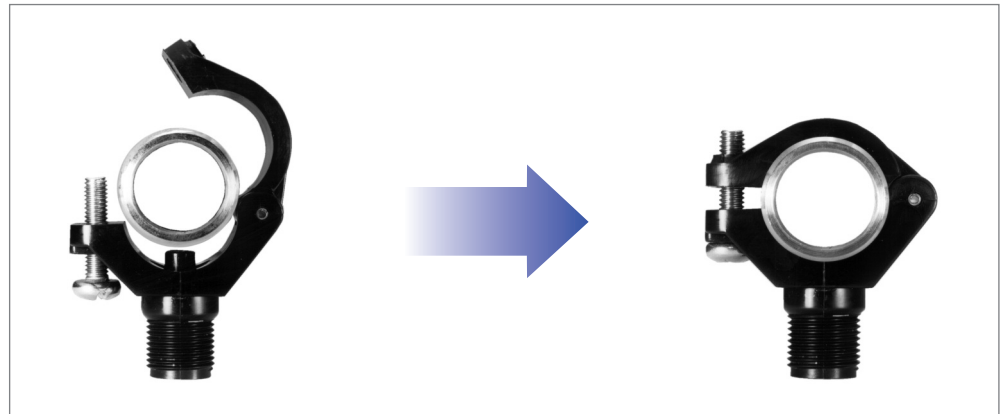

Für Baureihe	Bestell-Nr.							Abmessungen [mm]					Gewicht (Messing 2.0401)					
	Type	Material-Nr.						G ISO 228	H ₁	H ₂	D	SW						
		16	17 ¹⁾	1Y	30	56	5E											
2TR/468/548 652/660/679 684	065.200	○	○	○	○	○	○	G 3/8	13,0	10,0	12,8	22	25 g					
	065.200	-	-	-	-	-	-							G 3/8	14,5	11,5	12,8	22
	069.000	○	-	○	○	○	-							UNF 11/16	14,3	8,7	13,1	21
656/657 664/665	065.600	○	○	-	○	-	○	G 3/4	16,0	13,0	20,1	32	60 g					

1) Wir behalten uns vor, unter der Material-Nr. 17 das Material Edelstahl 1.4571 oder Edelstahl 1.4404 zu liefern.

Siebfilter und Kugelrückschlagventile finden Sie auf Seite 9.8