

Rotating cleaning nozzle NanoSpinner2 Series 5M1




Features:

- Compact design for confined spaces
- Hygienic design
- Suitable for high temperatures
- Made entirely of stainless steel



**ATEX version
available on
request**

Series 5M1

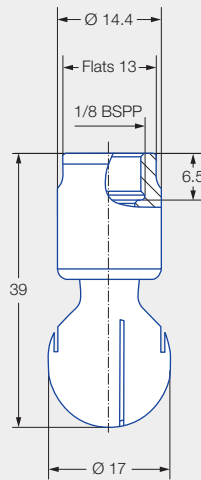

Female thread

Max. tank diameter [m]	0	1	2	3	4	5	6	7	8	9
------------------------	---	---	---	---	---	---	---	---	---	---



Cleaning efficiency class
2



Max. temperature
250 °C



Installation
Operation in every direction is possible



Bearing
Double ball bearing made of stainless steel 316L



Material
Stainless steel 316L



Recommended operating pressure
2 bar




Filtration
Line strainer with a mesh size of 0,1mm/170 mesh

Function video

www.lechler.com/de-en/medialibrary
Or scan the QR Code.



Spray angle	Ordering number	Narrowest free cross section \varnothing [mm]	\dot{V} water [l/min]				Max. tank diameter [m]
	Type 1/8 BSPP		p [bar] (p _{max} = 7 bar)				
			1.0	2.0	3.0	at 40 psi [US gal/min]	
360° 	5M1.879.1Y.AB	0.4	11	15	18	5	1.4
	5M1.929.1Y.AB	0.5	14	20	25	6	1.6

NPT thread available on request.

The maximum tank diameter applies to the recommended operating pressure and is meant as a recommendation only.
The cleaning result is also affected by the type of soiling.

Compressed air should be used for dry blowing for a short time only. Operation above the recommended operating pressure has a negative impact on the cleaning result and wear.